Electrical Rating:
Rating: 3 Amps with resistive load @ 120 VAC or 28 VDC
or 1 Amp with resistive load @ 250 VAC
Life expectancy: 60,000 cycles @ full load
Contact Resistance: 20 milliohms Max, initial @ 2-4 VDC 100 mA
Insulation resistance: 1,000 Megohms minimum
Dielectric Strength: 1,000 V RMS @ sea level
Operating Temperature: -30 to 85 degrees Celsius

Mechanical:
Case: Dially phthalate (DAP) UL94-0
Plunger: Thermo Plastic Polyester (Black)
Housing: Stainless Steel
Bushing: Brass N.P.
Contacts: Silver
Terminal: Brass, Silver plated.

Right angle, horizontal style SPST

Part No.	Circuit
30-20500	SPST, OFF- (ON)

NOTE: ( ) = Momentary

P.C. MOUNTING

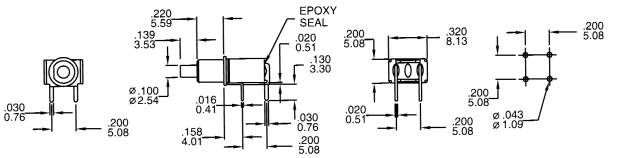

Right angle, horizontal style SPDT

P.C. MOUNTING

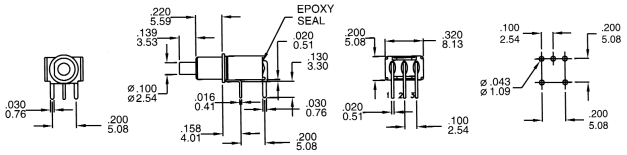

Part No.	Circuit
30-20507	SPDT, ON- (ON)

NOTE: ( ) = Momentary

Right angle, vertical style SPST

Part No.	Circuit
30-20512	SPST, OFF-(ON)

NOTE: ( ) = Momentary

P.C. MOUNTING

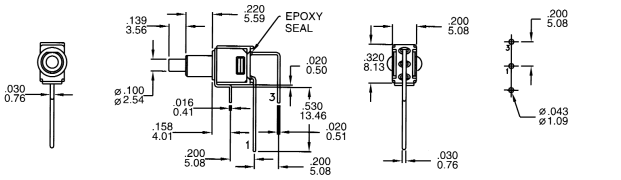

Right Angle vertical style SPDT

P.C. MOUNTING

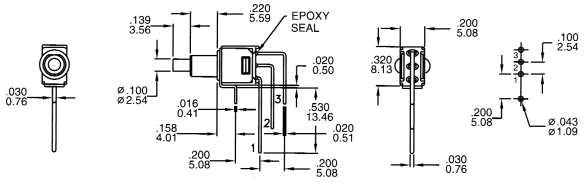

Part No.	Circuit
30-20516	SPDT, ON -(ON)

NOTE: ( ) = Momentary

Vertical Mounting w/bracket SPST

Part No.	Circuit
30-20522	SPST, OFF- (ON)
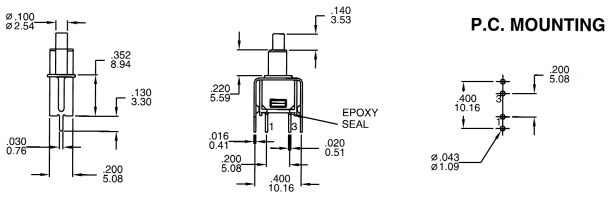
NOTE: ( ) = Momentary