


# SWITCHES ROCKER

## LIGHTED HEAVY DUTY ROCKER SWITCHES

### SPECIFICATIONS:

<b>Current Rating:</b>	15A @ 125V AC, 10A @ 250 VAC 1/2HP 125-250VAC				
<b>Insulation Resistance:</b>	100 Meg ohms. (Min.)				
<b>Dielectric Strength:</b>	1000V (Min.)				
<b>Base Material:</b>	Phenolic				
<b>Terminal Type:</b>	.250" Quick Connect				
Part No.	Type	Action			Actuator
30-652	SPST	ON	-	OFF	Amber Nylon

\* Lamp Voltage 125VAC/Neon

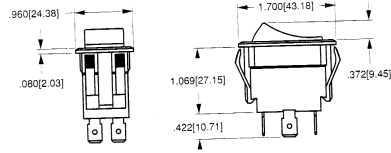


Mounting Hole: 0.83" x 1.45"



### SPECIFICATIONS:

<b>Current Rating:</b>	20A @ 125V AC, 15A @ 250 VAC 16 (6) A-125VAC T85, 125A Peak Inrush Current				
<b>Insulation Resistance:</b>	100 Meg ohms. (Min.)				
<b>Dielectric Strength:</b>	1000V (Min.)				
<b>Base Material:</b>	Nylon				
<b>Actuator Material:</b>	Nylon/Polycarbonate				
<b>Terminal Type:</b>	.250" Quick Connect				
Part No.	Type	Action			Actuator
30-16867	DPST	ON	-	OFF	Red Translucent

## LIGHTED HIGH INRUSH HEAVY DUTY ROCKER SWITCH

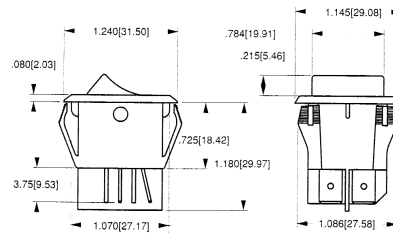


Mounting Hole: 0.872" x 1.125"



### SPECIFICATIONS:

<b>Current Rating:</b>	10A @ 125VAC, 6A @ 250VAC				
<b>Initial Contact Resistance:</b>	50 Meg ohm (Max.)				
<b>Insulation Resistance:</b>	DC 300V 100 Meg ohm. (Min.)				
<b>Dielectric Strength:</b>	1500VAC for 1 Min.				
<b>Terminal Type:</b>	.187" Quick Connect				
Part No.	Type	Action			Actuator
30-16086	SPST	ON	-	OFF	Red Nylon


\* Lamp Voltage 125VAC/Neon 33K ohm

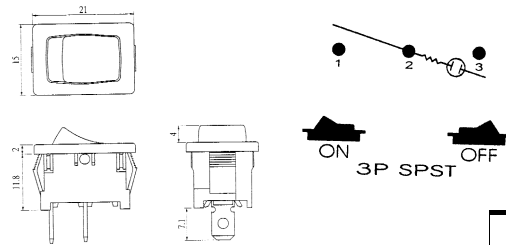

Mounting Hole: 0.512" x 0.756"



## CIRCUIT DIAGRAM



Lamp Voltage: Neon 105-125V AC

### SPECIFICATIONS:

ELECTRICAL RATINGS:					
20A	125-250V AC	85C	UL E45221		
1/2HP	125V AC	1HP 250V AC	UL E45221		
20A	125-250V AC		CSA LR10990		
16 (4)A	250V AC	T85	VDE 62411		
150A	Inrush		Semko IEC 65		
Part No.	Type	Action			Actuator
30-866	DPST	ON	-	OFF	Black Plastic w/ Red Neon
30-867	DPST	ON	-	OFF	Red Plastic



## LIGHTED ROCKER SWITCHES

