

FEED THRU CORD SWITCH

SPECIFICATIONS:

Current Rating:	6A @ 125V AC, 3A @ 250V AC				
Initial Contact Resistance:	DC 2.5V-1A, 20 Meg ohm (Min.)				
Insulation Resistance:	500V DC 100 Meg ohm (Min.)				
Dielectric Strength:	1500V AC for 1 minute				
Contact Material:	Brass				
Terminal Material:	Spring Brass				
Terminal Type:	Insulation Piercing				
Part No.	Type	Action			Actuator
30-10098	SPST	ON	-	OFF	Round Plastic Dial



HI-LO INLINE DIMMER SWITCH

SPECIFICATIONS:


Current Rating:	6A @ 125V AC, 3A @ 250V AC				
Initial Contact Resistance:	DC 2.5V-1A, 20 Meg ohm (Min.)				
Insulation Resistance:	500V DC 100 Meg ohm (Min.)				
Dielectric Strength:	1500V AC for 1 minute				
Contact Material:	Brass				
Terminal Material:	Spring Brass				
Terminal Type:	Insulation Piercing				
Part No.	Type	Action			Actuator
30-10196	SPDT	ON	ON	OFF	Round Plastic Dial



FEED THRU CORD SWITCH

SPECIFICATIONS:

Current Rating:	15A @ 125V AC				
Dielectric Strength:	300 Volt				
Terminal Material:	Brass				
Terminal Type:	Screw				
Wire Type:	Flat or round cords				
	Flat: 18/2 & 16/2, SPT-1, SPT-2, HPN				
	Round: 18/2 type SVT, up to 9/32" O.D.				
Part No.	Type	Action			Actuator
30-9851	SPDT	ON	-	OFF	White Plastic

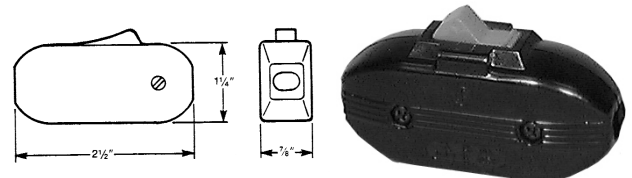

CORDED INLINE DIMMER SWITCH

SPECIFICATIONS:

Current Rating:	3A @ 125V AC				
Initial Contact Resistance:	DC 2.5V-1A, 20 Meg ohm (Min.)				
Insulation Resistance:	500V DC 100 Meg ohm (Min.)				
Dielectric Strength:	1500V AC for 1 minute				
Contact Material:	Brass				
Terminal Material:	UL SPT-1 18AWG 2 Cond. Wire, Stripped				
Terminal Type:	120V AC Plug/Stripped Ends				
Part No.	Type	Action			Actuator
30-10192	SPST	ON	-	OFF	Roller Ball

