


The LKG Wire Knutt, A push - in wire connector, fast, alternative to wire nuts.

The LKG Wire Knutt accommodate wire sizes from 22 to 12 AWG (solid conductors). Fast assembly! Strip wire (0.43" or 11 mm strip length) and push it into the knutt. Fast and secure; use in machinery, house wiring etc. for fast and secure connection of wires of same size or various sizes. Available in sizes for joining from two to eight wires.


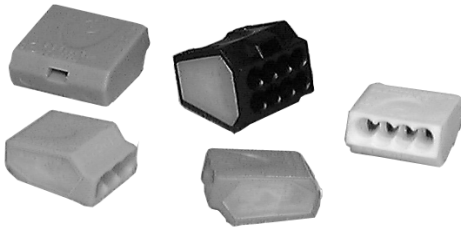


Specification:



Housing Material: Thermoplastic, UL 94V-2 flame retardant
 Current: 24A (VDE)
 Voltage: UL-600V, VDE-450V.
 Temperature Rating: 110°C
 UL file No.: E - 113650





PART NUMBER	COLOR	WIRES
65-252	RED	2
65-253	ORANGE	3
65-254	YELLOW	4
65-255	GREY	5
65-258	BLACK	8





65-252





65-253



65-254



65-255



65-258

TWIST-ON WIRE CONNECTORS



UL Listed



Molded of rugged, impact and heat resistant plastic. Color identifies size. Heavy ribbed bodies for easy gripping. Display package of 10.

No. WN33 - Small - orange
No. WN33B - bulk
 Wire Sizes: #18 to #16
 Rating: 300V/Building wire, 300V/Signs & Fixtures

No. WN44 - Medium - yellow
No. WN44B - bulk
 WIRE SIZES: #18 to #12
 Rating: 600V/ Building wire, 1000v/ Signs & Fixtures

No. WN66 - Large - red
No. WN66B - bulk
 Wire size: #18 to #10
 Rating: 600v/ Building wire, 1000v/ Signs & Fixtures

REPLACEMENT AC PLUGS

Black; Solder Terminals



No. 8464



No. 8465



No. 8466

VINYL PLASTIC ELECTRICAL TAPE



UL LISTED

66 ft. rolls x 3/4" wide, black vinyl tape, with a dielectric strength of 12,000 volts, and tensile strength of 15 lbs. per inch. Thickness 7-9 mils. Flexible stretch, waterproof, and will resist oil, gasoline, salt water, alkalis, and sunlight.



No. PT2
No. PT2B -bulk packaged

CONVENIENCE RECEPTACLE



UL Approved

No. R118J

Suitable for accessory equipment power outlets on amplifiers, pre-amplifiers, clock radio chassis, etc. Requires 1-1/16" x 7/16" rectangular cutout.
 Non Polarized Receptacle.