



Car Stereo Wiring Harnesses

CHRYSLER / DODGE / JEEP 1984 - UP
for POWER & (4) SPEAKERS, (7) PINS

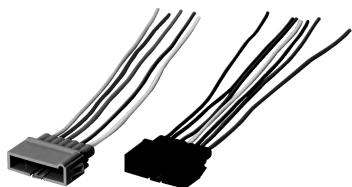


No. 64-5005

Ford / Lincoln / Mercury 1986 - UP
for POWER & (4) SPEAKERS, (8) PINS



No. 64-5015

General Motors Autos 1978 - 1990
for POWER & (4) SPEAKERS, (12) PINS

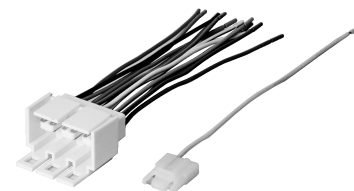

No. 64-5020

General Motors Autos 1988 - UP
for POWER & (4) SPEAKERS, (21) PINS



No. 64-5010

Honda / Acura 1986 - UP
for POWER & (4) SPEAKERS, (16) PINS



No. 64-5025

Solderless Terminals

Vinyl Insulated Ring Connectors

Part No.	Wire Size	Stud Size	Color	Package
65-1587	8 Ga.	1/4"	Red	4 Pcs.
65-1588	8 Ga.	5/16"	Red	4 Pcs.
65-1589	8 Ga.	3/8"	Red	4 Pcs.
65-1597	4 Ga.	1/4"	Yellow	2 Pcs.
65-1598	4 Ga.	5/16"	Yellow	2 Pcs.
65-1599	4 Ga.	3/8"	Yellow	2 Pcs.
65-1609	1/0 Ga.	3/8"	Red	2 Pcs.



Non - Insulated Ring Connectors

Part No.	Wire Size	Stud Size	Package
65-1087	8 Ga.	1/4"	4 Pcs.
65-1088	8 Ga.	5/16"	4 Pcs.
65-1089	8 Ga.	3/8"	4 Pcs.
65-1097	4 Ga.	1/4"	2 Pcs.
65-1098	4 Ga.	5/16"	2 Pcs.
65-1099	4 Ga.	3/8"	2 Pcs.
65-1109	1/0 Ga.	3/8"	2 Pcs.



Vinyl Insulated Butt Connectors

Part No.	Wire Size	Package
65-1243	8 Ga.	4 Pcs.
65-1246	4 Ga.	2 Pcs.



Stud	Size	mm	inch
	1/4	6.4	.250
	5/16	7.9	.312
	3/8	9.5	.375

12 V Red / Black Zip Cords

Philmore Red / Black zip cord is made for 12V DC applications. They are available in three wire sizes, 100 Ft. spool.

Specifications:

Insulation Material: PVC, FT1, 30V.

Conductor: Bare Copper.

Temperature: 80° C.

Part No.	Gauge	Length	Strands
64-2010	20 Ga.	100 Ft.	26 / 0.16mm (34 AWG)
64-2210	22 Ga.	100 Ft.	17 / 0.16mm (34 AWG)
64-2410	24 Ga.	100 Ft.	11 / 0.16mm (34 AWG)

