


SWITCHES

VANDAL RESISTANT SWITCHES

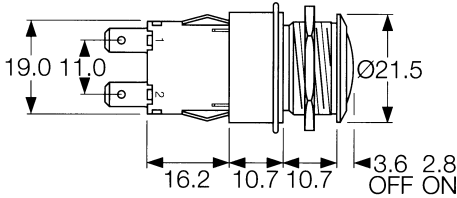

Current Rating:	12A 250VAC DP, 13A 250VAC SP
Initial Contact Resistance:	<100Meg Ohms @12VDC
Insulation Resistance:	>20Meg Ohms
Dielectric Strength (Open Contacts):	>1000V for 1 minute
Contact Material:	Silver Alloy
Terminal Material:	Copper Alloy
Body Material:	Nylon 6.6
Actuator & Bezel:	Stainless Steel
Terminal Type:	.187" Quick Connect


Part No.	Type	Action	Actuator
30-14300	SPST	On-Off	Stainless Steel
30-14350	DPST	On-Off	Stainless Steel
30-14310	SPST	(On)-Off	Stainless Steel
30-14360	DPST	(On)-Off	Stainless Steel

() = Momentary




Mounting Hole: 19.5mm (.76")
Panel thickness up to 3.0 mm

VANDAL RESISTANT SNAP ACTION SWITCH



Dimensions
383 2510V



Current Rating:	22A 125-250VAC 1Hp @ 65° C
Mechanical Life:	>10 Million Operations
Insulation Voltage:	>1250V
Tracking Force:	120g
Contact Material:	Fine Silver
Terminal Material:	Copper Alloy
Body Material:	Nylon 6.6 VO
Actuator & Bezel:	Stainless Steel
Terminal Type:	.250" Quick Connect



Part No.	Type	Action	Actuator
30-14340	SPDT	On -(On)	Stainless Steel

() = Momentary



Mounting Hole: 19.5mm (.76")
Panel thickness up to 8.0 mm

MINIATURE ROCKER SWITCH



Current Rating:	10A 250VAC, 1/2 Hp @ 277VAC, 1/4 Hp @125VAC
Initial Contact Resistance:	<100Meg Ohms @12VDC
Insulation Resistance:	>20Meg Ohms
Dielectric Strength (Open Contacts):	>1000V for 1 minute
Contact Material:	Silver Alloy
Terminal Material:	Copper Alloy
Body Material:	Nylon 6.6
Actuator & Bezel:	Nylon 6.6
Terminal Type:	.187" Quick Connect

Part No.	Type	Action	Actuator
30-16860*	DPDT	On-(On)	Black Nylon
30-16870	DPDT	On-Off-On	Black Nylon

*note: 30-16860 is 6A @ 277VAC

() = Momentary



Mounting Hole: 21.9mm x 19.2mm