


SWITCHES MINIATURE & TOGGLE

MINIATURE TOGGLE SWITCHES - 3PDT

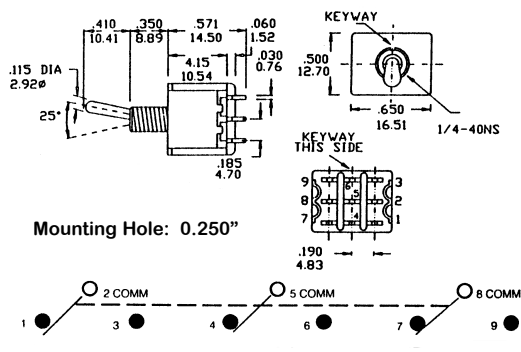


SPECIFICATIONS:

Current Rating:	5A @ 120V AC/28V DC, 2A @ 250V AC
Initial Contact Resistance:	2-4V DC 1A 10m ohm
Insulation Resistance:	1000 Meg ohm (Min.)
Dielectric Strength:	1000V RMS @ Sea Level
Contact Material:	Coin Silver - Silver Plate
Terminal Material:	Brass - Silver Plate
Terminal Type:	Solder

Part No.	Replaces	Type	Action			Actuator
30-10022	10022	3PDT	ON	-	ON	Metal
30-10024	10024	3PDT	ON	OFF	ON	Metal
30-10026	10026	3PDT	(ON)	OFF	(ON)	Metal
30-10028	10028	3PDT	ON	OFF	(ON)	Metal
Terminal Connection			2-3, 5-6, 8-9	Open	2-1, 5-4, 8-7	

NOTE: () = Momentary

MINIATURE TOGGLE SWITCHES - 4PDT

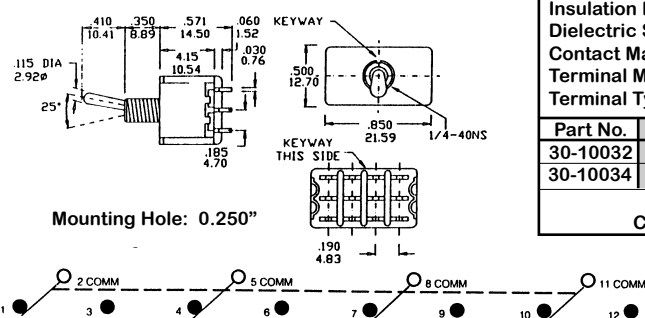


SPECIFICATIONS:

Current Rating:	5A @ 120V AC/28V DC, 2A @ 250V AC
Initial Contact Resistance:	2-4V DC 1A 10m ohm
Insulation Resistance:	1000 Meg ohm (Min.)
Dielectric Strength:	1000V RMS @ Sea Level
Contact Material:	Coin Silver - Silver Plate
Terminal Material:	Brass - Silver Plate
Terminal Type:	Solder

Part No.	Replaces	Type	Action			Actuator
30-10032	10032	4PDT	ON	OFF	ON	Metal
30-10034	10034	4PDT	ON	-	ON	Metal
Terminal Connection			2-3, 5-6, 8-9, 11-21	Open	2-1, 5-4, 8-7, 11-10	

SPST & SPDT STANDARD SIZE TOGGLE SWITCHES




Mounting Hole: 0.500"

SPECIFICATIONS:

Current Rating:	15A @ 125/250V AC
Initial Contact Resistance:	50 Meg ohm
Insulation Resistance:	100 Meg ohm (Min.) @ 500V DC
Dielectric Strength:	1000V AC 50/60 Hz for 1 minute
Contact Material:	Brass - Nickel Plated
Terminal Material:	Brass - Nickel Plated
Actuator Type:	Metal

Part No.	Replaces	Type	Action			Terminal
30-1100	T100	SPST	ON	-	OFF	Solder
30-1104	T104	SPST	ON	-	OFF	Screw
30-1110	T110	SPDT	ON	-	ON	Solder
30-1114	T114	SPDT	ON	-	ON	Screw
30-1120	T120	SPDT	ON	OFF	ON	Solder
30-1124	T124	SPDT	ON	OFF	ON	Screw

DPST & DPDT STANDARD SIZE TOGGLE SWITCHES



Mounting Hole: 0.500"

SPECIFICATIONS:

Current Rating:	15A @ 125/250V AC
Initial Contact Resistance:	50 Meg ohm (Max.)
Insulation Resistance:	100 Meg ohm (Min.) @ 500V DC
Dielectric Strength:	1000V AC 50/60 Hz for 1 minute
Contact Material:	Brass - Nickel Plated
Terminal Material:	Brass - Nickel Plated
Actuator Type:	Metal

Part No.	Replaces	Type	Action			Terminal
30-1130	T130	DPST	ON	-	OFF	Solder
30-1134	T134	DPST	ON	-	OFF	Screw
30-1140	T140	DPDT	ON	-	ON	Solder
30-1144	T144	DPDT	ON	-	ON	Screw
30-1150	T150	DPDT	ON	OFF	ON	Solder
30-1154	T154	DPDT	ON	OFF	ON	Screw