


ROCKER SWITCH

SPECIFICATIONS:

Current Rating:		16A @ 125V AC, 10A @ 250V AC			
Initial Contact Resistance:		50 Meg ohm (Max.)			
Insulation Resistance:		500V DC 100 Meg ohm (Min.)			
Dielectric Strength:		1500V AC for 1 minute			
Contact Material:		Copper - Silver Plate			
Terminal Material:		Copper - Silver Plate			
Terminal Type:		.250" Quick Connect			
Part No.	Type	Action			Actuator
30-16091	SPST	ON	-	OFF	Black Nylon
30-16093	SPST	ON	-	OFF	Black Nylon with Red Legend
30-16703*	SPST	ON	-	OFF	Black Nylon with Red Legend
30-16094	SPDT	ON	OFF	ON	Black Nylon
30-10080	SPDT	ON	-	ON	Black Nylon

*8 3=4HP Rating

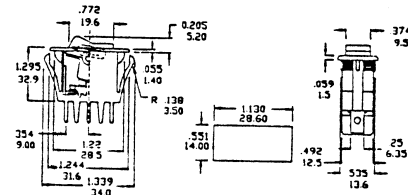


Mounting Hole: 0.130 ; 1.130



POWER ROCKER SWITCH

SPECIFICATIONS:

Current Rating:			16A @ 125V AC, 10A @ 250V AC			
Initial Contact Resistance:			50 Meg ohm (Max.)			
Insulation Resistance:			500V DC 100 Meg ohm (Min.)			
Dielectric Strength:			1500V AC for 1 minute			
Contact Material:			Copper - Silver Plate			
Terminal Material:			Copper - Silver Plate			
Terminal Type:			.250" Quick Connect			
Part No.	Replaces	Type	Action			Actuator
30-10082	10082	DPDT	ON	-	ON	Nylon

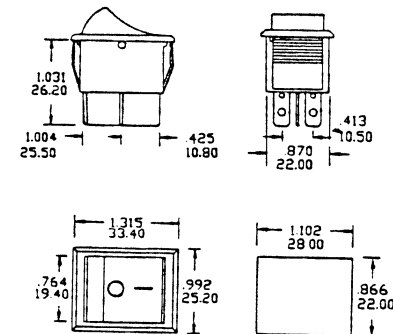


Mounting Hole: 0.870 ; 1.100



POWER ROCKER SWITCH

SPECIFICATIONS:

Current Rating:		16A @ 125V AC, 10A @ 250V AC				
Initial Contact Resistance:		50 Meg ohm (Max.)				
Insulation Resistance:		500V DC 100 Meg ohm (Min.)				
Dielectric Strength:		1500V AC for 1 minute				
Contact Material:		Copper - Silver Plate				
Terminal Material:		Copper - Silver Plate				
Terminal Type:		.250" Quick Connect				
Part No.	Replaces	Type	Action			Actuator
30-10084	10084	SPST	ON	-	OFF	Red Nylon

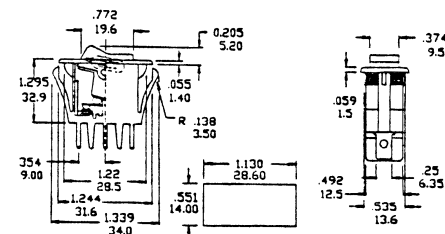

Mounting Hole: 0.130 ; 1.130




SPECIFICATIONS:

Current Rating:		20A @ 125V AC, 10A @ 277V AC 3/4 HP @ 125-250V AC			
Initial Contact Resistance:		5 Meg ohm (Max.)			
Insulation Resistance:		100 Meg ohm (Min.)			
Dielectric Strength:		1000V AC for 1 minute			
Gasket:		Molded Elastomer			
Case:		UL94 Flame Class, 94V-2			
Contact Material:		Brass			
Terminal Material:		Brass			
Terminal Type:		.250" Quick Connect			
Part No.	Type	Action			Actuator
30-600	SPST	ON	-	OFF	Black Nylon
30-670	SPST	ON	-	(OFF)	Black Nylon
30-610	SPDT	ON	-	ON	Black Nylon
30-620	SPDT	ON	OFF	ON	Black Nylon

NOTE: () = Momentary



SINGLE POLE HEAVY DUTY ROCKER SWITCHES (Moisture and Dust Resistant)

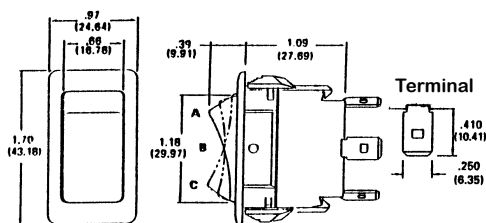

Recommended Mounting Hole:

±.01: 9.381 9.00: 9.127

Fits .830 (21.08) ; 1.4:0 (36.83) panel cutout in .093 (2.36)<.12: (3.18)<.187 (4.7:) thick panels.

