

AC PLUG-IN DIMMER SWITCH

SPECIFICATIONS:


Current Rating:	3A @ 125V AC For Devices up to 150 Watts					
Contact Material:	Nickel Plated Brass					
Terminal Material:	Brass					
Terminal Type:	120V AC Plug & Jack					
Part No.	Replaces	Type	Action		Actuator	
30-10194	10194	SPST	ON	-	OFF	Round Plastic Knob



KNIFE SWITCH

SPECIFICATIONS:

Current Rating:	300MA @50V AC, 500MA @ 6V DC				
Initial Contact Resistance:	15MW (Max.)				
Terminal Material:	Nickel Plated Steel				
Contact Material:	Nickel Plated Steel				
Terminal Type:	Screw				
Base Material:	ABS				
Part No.	Type	Action			Actuator
30-9730	DPDT	ON	OFF	ON	Plastic Handle

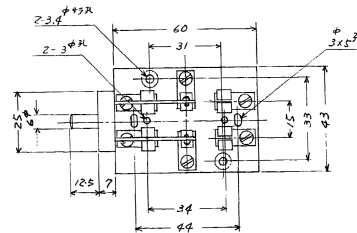


Dimensions: 43mm x 60mm
Mounting Centers: 44mm

MERCURY TILT SWITCH

SPECIFICATIONS:

Current Rating:	1A @ 250V AC				
Tilt Angle:	12°				
Contact Material:	Iron Alloy/Mercury				
Terminal Material:	Copper Wire				
Terminal Type:	Wire Leads				
Part No.	Replaces	Type	Action		Actuator
30-10074	10074	SPST	Normally open or closed. Dependent upon tilt angle.		Iron Alloy/Mercury

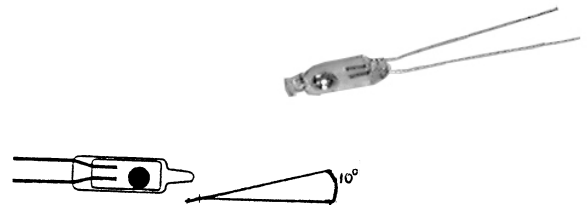

NON MERCURY TILT SWITCH

SPECIFICATIONS:

Current Rating:	.5A @ 24V AC	
Tilt Angle:	15°	
Terminal Type:	.35" Leads	
Part No.	Type	Action
30-17072	SPST	Normally open or closed. Dependent upon tilt angle.

