


TERMINAL BLOCKS & BARRIER STRIPS

20 Amp Dual Row Terminal Blocks

Specifications:

Rating: UL 20A @250V
 CSA 20A @150V
 Center Spacing: 3/8" (.375)
 Wire Size: #14-22 AWG Copper
 Screw Size: #6 Combo Head
 Distance Between Barriers: .30"
 Material: UL Rated 94VO Thermoplastic
 Operating Temperature: 130°C (260°F) Max.
 -40°C (-40°F) Min.
 Breakdown Voltage: 3600V RMS

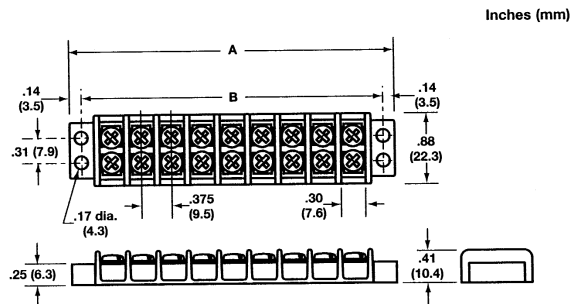



| Part Number | No. Poles | "A" dim. | "B" dim. |
|-------------|-----------|----------|----------|
| 13-1402 | 2 | 1.40" | 1.12" |
| 13-1403 | 3 | 1.78" | 1.50" |
| 13-1404 | 4 | 2.16" | 1.88" |
| 13-1405 | 5 | 2.53" | 2.25" |
| 13-1406 | 6 | 2.90" | 2.62" |
| 13-1407 | 7 | 3.28" | 3.00" |
| 13-1408 | 8 | 3.66" | 3.38" |
| 13-1409 | 9 | 4.03" | 3.75" |

| Part Number | No. Poles | "A" dim. | "B" dim. |
|-------------|-----------|----------|----------|
| 13-1410 | 10 | 4.40" | 4.12" |
| 13-1412 | 12 | 5.16" | 4.88" |
| 13-1414 | 14 | 5.90" | 5.62" |
| 13-1416 | 16 | 6.66" | 6.38" |
| 13-1418 | 18 | 7.40" | 7.12" |
| 13-1420 | 20 | 8.16" | 7.88" |
| 13-1422 | 22 | 8.90" | 8.62" |

Heavy Duty 20 Amp Dual Row Terminal Blocks

Specifications:

Rating: UL 20A @300V
 CSA 20A @300V
 Center Spacing: 7/16" (.437)
 Wire Size: #12-22 AWG Copper
 Screw Size: #6 Combo Head
 Distance Between Barriers: .353"
 Material: UL Rated 94VO Thermoplastic
 Operating Temperature: 130°C (260°F) Max.
 -40°C (-40°F) Min.
 Breakdown Voltage: 4800V RMS

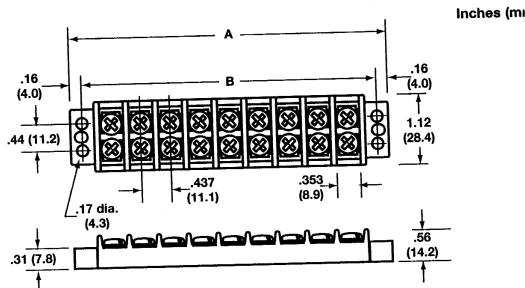

| Part Number | No. Poles | "A" dim. | "B" dim. |
|-------------|-----------|----------|----------|
| 13-1502 | 2 | 1.63" | 1.31" |
| 13-1503 | 3 | 2.07" | 1.75" |
| 13-1504 | 4 | 2.51" | 2.18" |
| 13-1505 | 5 | 2.94" | 2.62" |
| 13-1506 | 6 | 3.38" | 3.06" |
| 13-1507 | 7 | 3.82" | 3.50" |
| 13-1508 | 8 | 4.25" | 3.93" |
| 13-1509 | 9 | 4.69" | 4.37" |

| Part Number | No. Poles | "A" dim. | "B" dim. |
|-------------|-----------|----------|----------|
| 13-1510 | 10 | 5.13" | 4.81" |
| 13-1512 | 12 | 6.00" | 5.68" |
| 13-1514 | 14 | 6.87" | 6.56" |
| 13-1516 | 16 | 7.75" | 7.43" |
| 13-1518 | 18 | 8.62" | 8.31" |
| 13-1520 | 20 | 9.50" | 9.18" |
| 13-1522 | 22 | 10.37" | 10.06" |