


SWITCHES ROCKER

LIGHTED HEAVY DUTY ROCKER SWITCHES

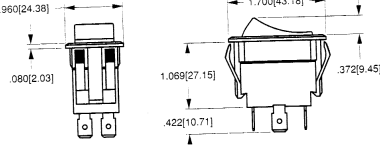

Mounting Hole: 0.83" x 1.45"


SPECIFICATIONS:

Current Rating:	15A @ 125V AC, 10A @ 250 VAC 1/2HP 125-250VAC
Insulation Resistance:	100 Meg ohms. (Min.)
Dielectric Strength:	1000V (Min.)
Base Material:	Phenolic
Terminal Type:	.250" Quick Connect

Part No.	Type	Action		Actuator
30-652	SPST	ON	- OFF	Amber Nylon

* Lamp Voltage 125VAC/Neon

LIGHTED HIGH INRUSH HEAVY DUTY ROCKER SWITCH

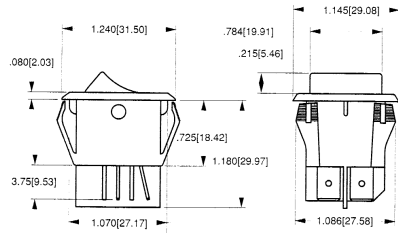


Mounting Hole: 0.872" x 1.125"

SPECIFICATIONS:

Current Rating:	20A @ 125V AC, 15A @ 250 VAC 16 (6) A-125VAC T85, 125A Peak Inrush Current
Insulation Resistance:	100 Meg ohms. (Min.)
Dielectric Strength:	1000V (Min.)
Base Material:	Nylon
Actuator Material:	Nylon/Polycarbonate
Terminal Type:	.250" Quick Connect

Part No.	Type	Action		Actuator
30-16867	DPST	ON	- OFF	Red Translucent

LIGHTED MINIATURE ROCKER SWITCHES

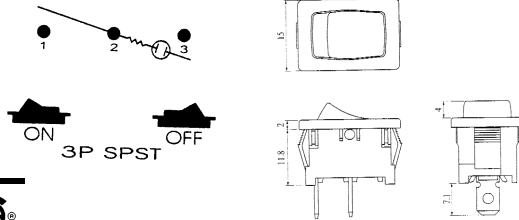

Mounting Hole: 0.512" x 0.756"






SPECIFICATIONS:

Current Rating:	10A @ 125VAC, 6A @ 250VAC
Initial Contact Resistance:	50 Meg ohm (Max.)
Insulation Resistance:	DC 300V 100 Meg ohm. (Min.)
Dielectric Strength:	1500VAC for 1 Min.
Terminal Type:	.187" Quick Connect

Part No.	Type	Action		Actuator
30-16096	SPST	ON	- OFF	Red Nylon

* Lamp Voltage 125VAC/Neon 33K ohm

LIGHTED ROCKER SWITCHES

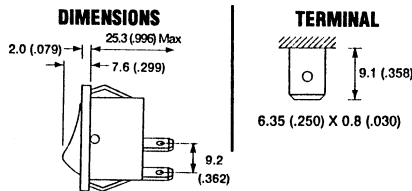


SPECIFICATIONS:

ELECTRICAL RATINGS:			
20A	125-250V AC 85C		UL E45221
1/2HP	125V AC 1HP 250V AC		UL E45221
20A	125-250V AC		CSA LR10990
16 (4)A	250V AC T85		VDE 62411
150A	Inrush		Semko IEC 65

Part No.	Type	Action		Actuator
30-866	DPST	ON	- OFF	Black Plastic w/ Red Neon
30-867	DPST	ON	- OFF	Red Plastic



CIRCUIT DIAGRAM



Lamp Voltage: Neon 105-125V AC